

ACO hygienic gully high capacity fixed height, vertical outlet

Product information

Fixed height gully can be specified as a point drainage in areas where waterproofing is independent of the gully body.

2 pieces are required for ordering grating for ACO gully high capacity.

Product benefits

- Hygienic design following EN 1672, EN ISO 14159 and EHEDG document No. 8, 13 and 44
- Fully pickled and passivated
- Fully removable and easily cleanable stainless steel foul air trap (FAT)
- Protective cover available. See page 252 for more details



	Top size [mm]	Outlet diameter Ø [mm]	Foul air trap	Material	Item number	RSK number	
	600 x 600	200	Without FAT	1.4301	446396		
				1.4404	446412		
				With FAT	1.4301	446397	
					1.4404	446413	

Gratings for ACO hygienic gully high capacity

Product information

Variety of grate types is available depending on application and requested load class.



For applications with high hygienic demands ladder grate or cast grate should be selected.

2 pieces are required for ordering grating for ACO hygienic gully high capacity.

Product benefits



- Hygienic design following EN 1672, EN ISO 14159 and EHEDG document No. 8, 13 and 44
- Fully pickled and passivated

ACO hygienic ladder grating

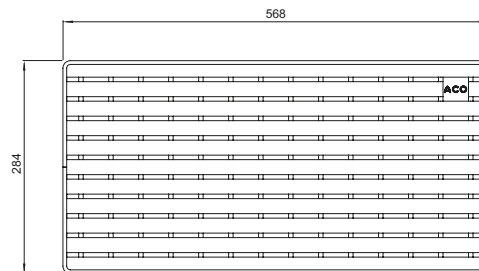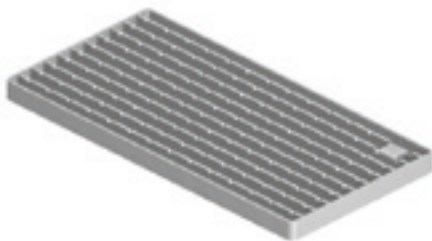

Load class	Slip resistant	Material	Item number	RSK number
R 50	Yes	1.4301	446400	
		1.4404	446416	

Accessories for ACO hygienic gully high capacity

	Description	Used with	Material	Item number	RSK number
	<p>ACO silt basket</p> <ul style="list-style-type: none"> ■ Stainless steel ■ 10,5 litre capacity 	<ul style="list-style-type: none"> ■ ACO hygienic gully high capacity □ Fixed height 	1.4301	446399	
			1.4404	446415	
	<p>ACO hygienic foul air trap</p> <ul style="list-style-type: none"> ■ Stainless steel 	<ul style="list-style-type: none"> ■ ACO hygienic gully high capacity □ Fixed height 	1.4301	446398	
			1.4404	446414	